


Management Communications

DES-GPRS

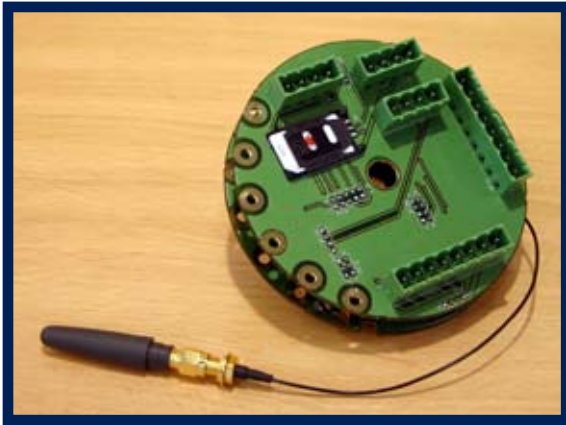

The DES-GPRS equipment from LMV are prepared to be connected to our flasher series from ultimate generation from the DES series.

Its use allows remote management of these ones as the sending of alarm signals from beacons and its GPS position if it's use with the synchronizer and position SYNC-GPS equipment.

The DES-GPRS module is specially design for its integration with the control/monitoring system from LMV, the SMS sending for alarms to specific numbers being the main function of the DES-GSM.

Technical specifications

- External Antenna of high gain..
- Asynchronous communication entry (RS232) level TTL for configuration.
- Configuration by HyperTerminal.

The configurable parameters are:

- 2 Port Serial Communications:
 - Port 485 LMV (Owner).
 - Puerto general purpose TTL.
- 8 Inputs configurable Analog / Digital.
- 8 Outputs.
- 4 Outputs TTL.
- 4 relay outputs (3 +1 high-powered team to define according to motor).
- Chance of Macros.
- Operating Mode demand and per event.

Electromagnetic compatibility **CE**